


FRONT ELEVATION

3/16' = 1'-0'

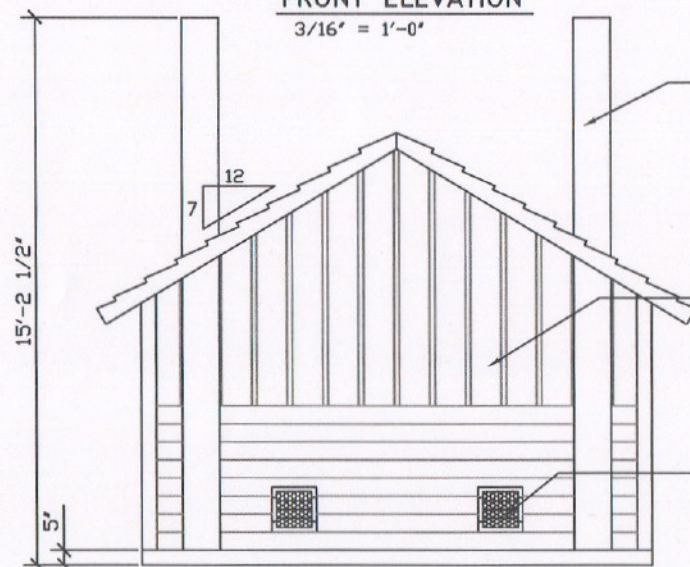

REAR ELEVATION

SHAKE TEXTURE
4-INCH CONCRETE
ROOF PANELS

HOLLOW METAL
FRAMED WINDOWS

ACCESSIBLE
UNISEX SIGN


LAP SIDING &
BOARD-N-BATTEN
TEXTURE 4-INCH
CONCRETE WALL
PANELS

KICK-PROOF STEEL
WALL LOUVER

3/0 X 6/8
HOLLOW METAL
DOOR AND
FRAME

5-INCH CONCRETE
FLOOR SLAB

1000 GALLON
CONCRETE SEWAGE
VAULT WITH ABS
LINER

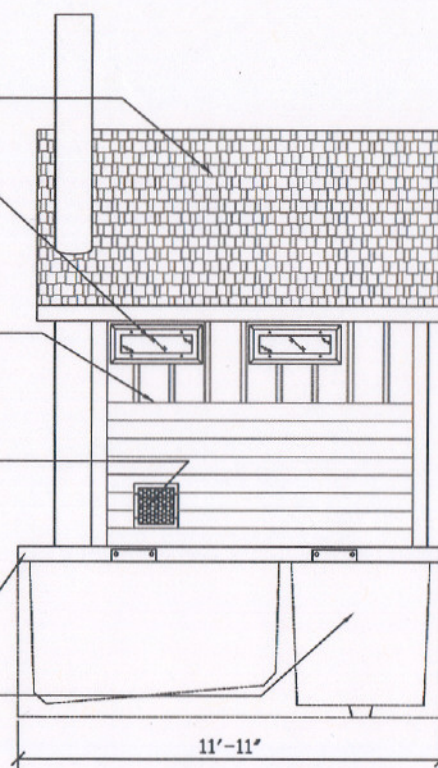

LEFT SIDE ELEVATION

(RIGHT SIDE MIRROR IMAGE)

DESIGN FEATURES REQUIRED FOR APPROVAL

ABS LINER CUSTOM FABRICATED TO FIT INSIDE
MINIMUM 1000 GALLON SEWAGE VAULT

12 INCH DIAMETER HDPE BLACK VAULT VENT
PIPE FOR EACH VAULT

GABLE ROOF DESIGN WITH DRIP EDGE AT SIDE
ELEVATIONS TO PREVENT RUSTING OF DOORS AND
PROTECTION OF USERS

7/12 MINIMUM ROOF SLOPE

FORMLINER FORMS TO PROVIDE A 'LAP SIDING &
BOARD-N-BATTEN' WALL TEXTURE

FORMLINER FORMS TO PROVIDE A 'SHAKE' ROOF
TEXTURE

BUILDING DESIGN MUST MEET MINIMUM
REQUIREMENTS FOR ACCESSIBLE TOILET ROOMS AS
REQUIRED BY THE AMERICAN WITH DISABILITIES
ACT ACCESSIBILITY GUIDELINES, LATEST EDITION.